





# AW 2.5" x 0.75" Rod Kit

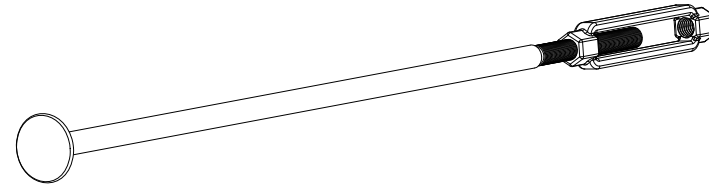

Drawn: JAB Date: 06/18/09

<b>Max System Tensile Force (FOS 1.67)</b>	12,000 lb	53,379 N
<b>Available System Lengths</b>	15 ft and 20 ft	4.6 m and 6.1 m
<b>Recommended Accessories</b>	Beveled PVC Washer, 4" Nylon Plate Washer	
<b>Standard Packaging</b>	2.5" x 0.75" Rod Head, Turnbuckle, 0.75" Extension Rod, HDG Fasteners	

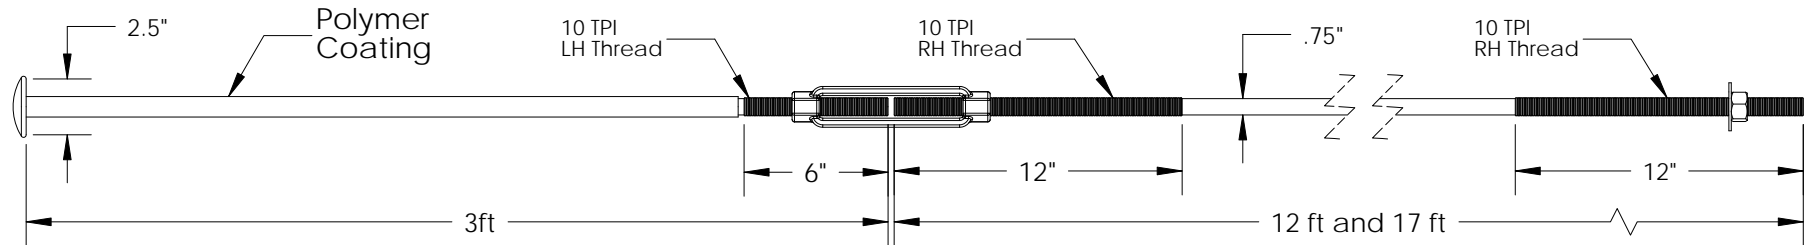

	Surface Treatment	Meets ASTM Specifications	ASTM Type
<b>Rod Head</b>	HDG Steel, Polymer Coating	A307	Grade A
<b>Turnbuckle</b>	HDG Steel	F1145	Type1 - Grade1 - ClassB
<b>Extension Rod</b>	HDG Steel	A307	Grade A

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, GatorBridge and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 6,000,883; 6,033,155; 6,053,666; D420,154; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 7,393,482; Other patents pending. © 2009 Crane Materials International. All Rights Reserved.