





# SC-7, SC-9 Rod Kit

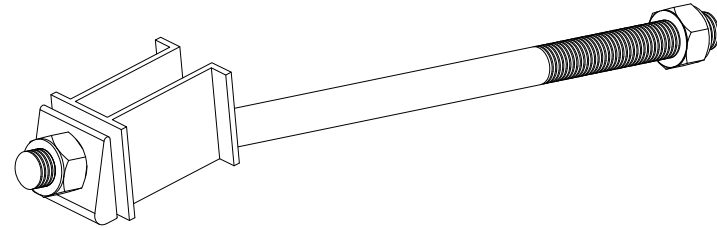

Drawn: JAB      Date: 06/18/09

Available Diameters	Max System Tensile Force (FOS 1.95)		System Lengths	
3/4"	6,509 lb	28,953 N	8 ft, 10 ft, 12 ft, 14 ft	2.4 m, 3.0 m, 3.7 m, 4.3 m
7/8"	9,003 lb	40,047 N	14 ft, 16 ft, 18 ft	4.3 m, 4.9 m, 5.5 m
1"	11,809 lb	52,529 N	16 ft, 18 ft, 20 ft	4.9 m, 5.5 m, 6.1 m

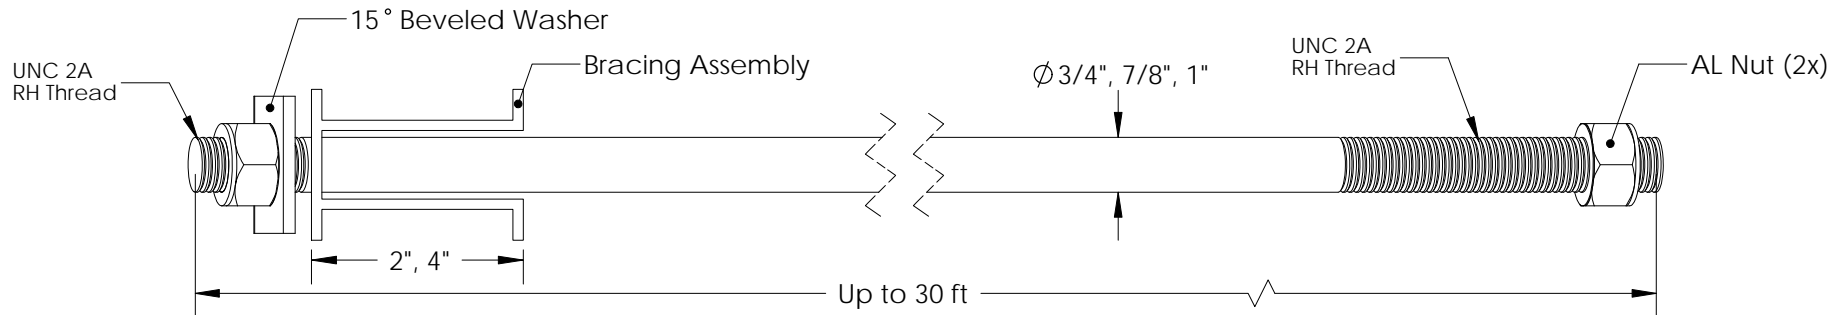

<b>Material</b>	6061-T6 Marine Grade Aluminum
<b>Standard Packaging</b>	Anchor Rod, Bracing Assembly, 15° Beveled Washer, Aluminum Nut (2x)
<b>Compatibility</b>	SC-7 Cap, SC-9 Cap

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, GatorBridge and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 6,000,883; 6,033,155; 6,053,666; D420,154; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 7,393,482; Other patents pending. © 2009 Crane Materials International. All Rights Reserved.