




TG 16" Pile

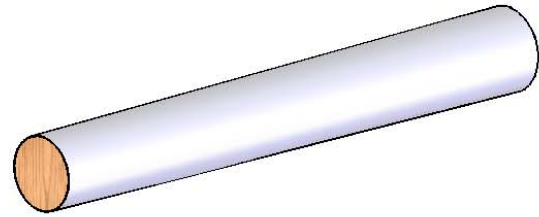

Drawn: JAB Date: 06/18/09

Core Material	Southern Pine Round Pile
Surface Material	UV Resistant Polymer
Recommended Accessories	TG Wrap, TG Sealant
Available Lengths	40 ft, 45 ft
Standard Colors	Clay, Grey, Brown

AWPI Allowable Stress Values for Treated Round Timber Piles Graded in Accordance with ASTM D25

Axial Compression (psi)	Bending (psi)	Shear Perpendicular to Grain (psi)	Compression Perpendicular to Grain (psi)	Modulus of Elasticity (psi)
1200	2400	110	250	1,500,000

Polymer Properties

Resin Properties	ASTM Test Method	Typical Values
Density (lbs/ft ³)	D-4883	59.3
Tensile Strength at Yield (psi)	D-638	3,900
Tensile Strength at Break (psi)	D-638	2,200
Elongation at Yield (%)	D-638	9
Elongation at Break (%)	D-638	600
Tensile Modulus (psi)	D-638	600
Flexural Modulus (psi)	D-790	260,000
Tensile Impact (ft-lbs/in ²)	D-1822	175,000
Coefficient of Linear Thermal Expansion (in/in/°F)	D-4696	7x10 ⁻⁵

Physical properties are defined by ASTM testing standards, The Aluminum Association Design Manual, and/or standard engineering practice. The values shown are nominal and may vary. The information found in this document is believed to be true and accurate. No warranties of any kind are made as to the suitability of any CMI product for particular applications or the results obtained there from. ShoreGuard, C-Loc, TimberGuard, GeoGuard, Dura Dock, Shore-All, and Gator Gates are registered trademarks of Crane Materials International. ArmorWare, Ultra Composite, GatorDocks, GatorBridge and CMI Waterfront Solutions are trademarks of Crane Materials International. United States and International Patent numbers 5,145,287; 6,000,883; 6,033,155; 6,053,666; D420,154; 6,575,667; 7,059,807; 7,056,066; 7,025,539; 7,393,482; Other patents pending. © 2009 Crane Materials International. All Rights Reserved.